
frost DRAINAGE

# Product Specification



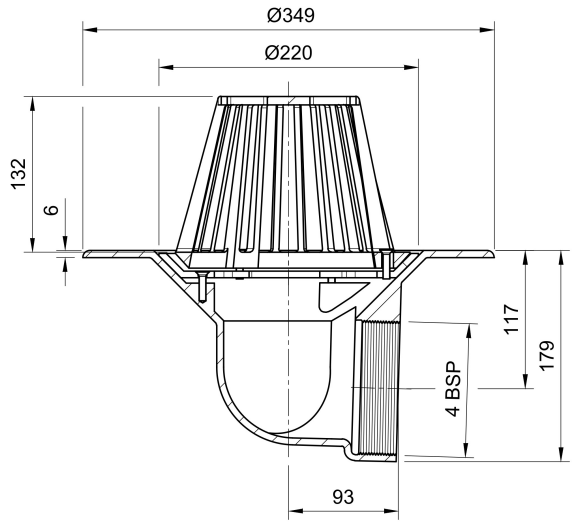


## Name
Frost Cold Roof drain assembly - fixed dome 220mm circular, medium sump body with clamp, horizontal threaded outlet 4" BSP

## Code
33.0044

## Description
Frost Cold Roof drain assembly - fixed dome 220mm circular, medium sump body with clamp, horizontal threaded outlet 4" BSP.
Domed rainwater outlets are suited to cold roof construction where the waterproof membrane is located on top of the roof deck.

Cast Iron Grade EN-GJL-150 to BS EN 1561:1997
80%-97% recycled materials
100% recyclable

Polycarbonate dome

## Body Material
CAST IRON

## Body Type
N/A

## Grating Material
POLYCARBONATE

## Flow Rate
7.88 l/s

## Outlet Type
THREADED

## Grating Type
DOMED

## Load Rating
N/A

## Threaded Joint Instructions

Apply Low Modulus Silicone to the thread of the pipe spigot & female thread within the roof outlet body. Using a flat spreading utensil, evenly spread the silicone into the threaded grooves. Insert the male into the female thread of the roof outlet body then carefully turn clockwise ensuring the thread is not "cross threading". Once fully tightened clean off excess silicone to both ends of the threaded connection.