
frost DRAINAGE

Product Specification



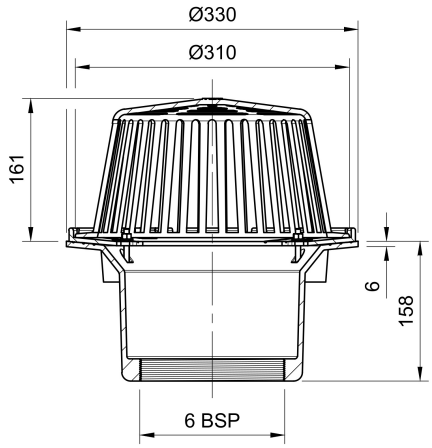

Name
Frost Cold Roof drain assembly - cast aluminium dome 310mm, large sump body with clamp, vertical threaded outlet 6" BSP

Code
33.0466

Description
Frost large sump roof deck drain, complete with cast aluminium dome and threaded outlet size 6" BSP. Supplied with body and clamp.
Domed rainwater outlets are suited to cold roof construction where the waterproof membrane is located on top of the roof deck.

Cast Iron Grade EN-GJL-150 to BS EN 1561:1997
80%-97% recycled materials
100% recyclable

Aluminium Grade LM 6 to BS EN 1559-4:1999
Greater than 90% recycled material
100% recyclable

Body Material
CAST IRON

Body Type
N/A

Grating Material
ALUMINIUM

Flow Rate
31.60

Outlet Type
THREADED

Grating Type
DOMED

Load Rating
N/A

Threaded Joint Instructions

Apply Low Modulus Silicone to the thread of the pipe spigot & female thread within the roof outlet body. Using a flat spreading utensil, evenly spread the silicone into the threaded grooves. Insert the male into the female thread of the roof outlet body then carefully turn clockwise ensuring the thread is not "cross threading". Once fully tightened clean off excess silicone to both ends of the threaded connection.