
frost DRAINAGE

# Product Specification



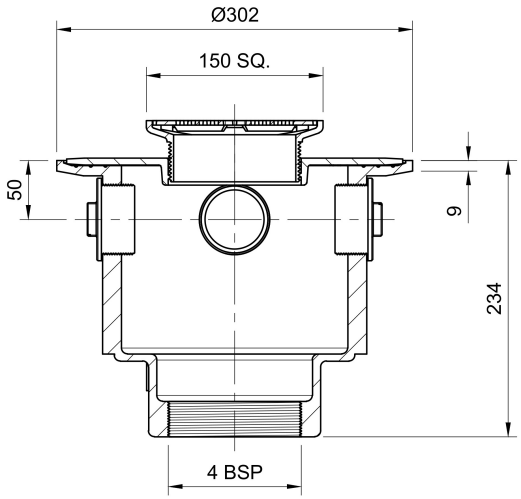


## Name
Frost Floor drain 150mm square stainless steel grating 3mm slots with large deep sump body and threaded outlet size 4" BSP

## Code
31.0885

## Description
Frost floor drain assembly with height adjustable Slimline Heel Proof 150mm square stainless steel slotted grating, large deep sump body and threaded outlet.
Membrane clamp & collar are an optional extra (31.2030). Can be trapped using a removable trap (31.9510).
Quick and easy to install
Maintenance free and durable
Connect body to all types of pipework in general use, using adaptors.
Stainless steel for use in areas where they contribute to the aesthetic appeal of an area.

Stainless Steel BS EN 10088-1:2005
Grade 1.4301 (304) or (316) if specified
Average recyclable content 75%-85%

Cast iron Grade EN-GJL-150 to BS EN 1561:1997
80-97% recycled materials
100% recyclable

## Body Material
CAST IRON

## Body Type
UNTRAPPED

## Grating Material
STAINLESS STEEL

## Flow Rate
N/A

## Outlet Type
THREADED

## Load Rating
L15 To BS EN 1253-1:2015

## Threaded Joint Instructions

Apply Low Modulus Silicone to the thread of the pipe spigot & female thread within the roof outlet body. Using a flat spreading utensil, evenly spread the silicone into the threaded grooves. Insert the male into the female thread of the roof outlet body then carefully turn clockwise ensuring the thread is not "cross threading". Once fully tightened clean off excess silicone to both ends of the threaded connection.