
frost DRAINAGE

Product Specification



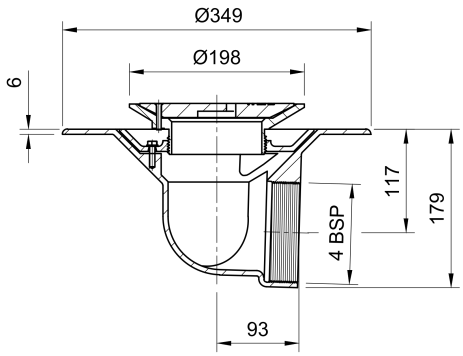

Name
Frost Floor drain 200mm circular ductile iron grating with medium sump body and horizontal threaded outlet size 4" BSP

Code
31.0467.H

Description
Frost Floor drain 200mm circular ductile iron grating with medium sump body and horizontal threaded outlet size 4" BSP.
Membrane clamp & collar are an optional extra (31.2030). Can be trapped using a removable trap (31.9510).
Quick and easy to install
Maintenance free and durable
Connect body to all types of pipework in general use, using adaptors.
Ductile iron is best suited for use in unfinished and/or industrial settings.

Ductile Iron BS EN 1563 & BS EN 1564
Greater than 80% recycled material
100% recyclable

Cast iron Grade EN-GJL-150 to BS EN 1561:1997
80-97% recycled materials
100% recyclable

Body Material
CAST IRON

Body Type
UNTRAPPED

Grating Material
DUCTILE IRON

Flow Rate
N/A

Outlet Type
THREADED

Grating Type
Circular

Load Rating
L15 To BS EN 1253-1:2015

Threaded Joint Instructions

Apply Low Modulus Silicone to the thread of the pipe spigot & female thread within the roof outlet body. Using a flat spreading utensil, evenly spread the silicone into the threaded grooves. Insert the male into the female thread of the roof outlet body then carefully turn clockwise ensuring the thread is not "cross threading". Once fully tightened clean off excess silicone to both ends of the threaded connection.