
Product Specification



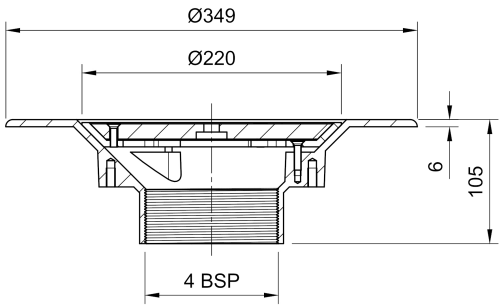

Name
Frost Aluminium Cold Roof drain assembly - aluminium grating, fixed 240mm circular, medium sump body with clamp, vertical threaded outlet 4" BSP

Code
34.0014

Description
Frost Cold Roof drain assembly with fixed 220mm circular flat grating, medium sump body and vertical threaded outlet 4" BSP.
Supplied with grating and clamp.
Suited to cold roof construction where the waterproof membrane is located on top of the roof deck.

Aluminium LM 6 to BS EN 1599-4:2015

Body Material
ALUMINIUM

Body Type
N/A

Grating Material
ALUMINIUM

Flow Rate
7.88 l/s

Outlet Type
THREADED

Grating Type
FLAT

Load Rating
N/A

Fire Rating
A1

Threaded Joint Instructions

Apply low modulus silicone to the spigot and roof outlet threads, spreading it evenly into the grooves. Screw the male thread clockwise into the outlet, ensuring it does not cross-thread, and wipe away excess silicone once fully tightened.