


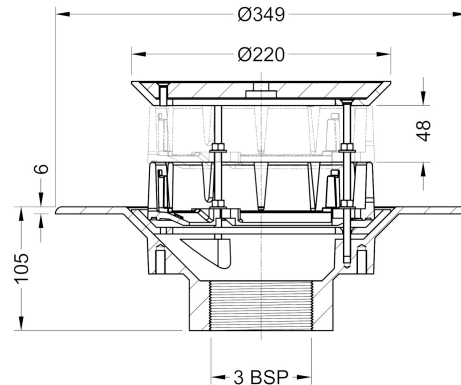

Name

Frost Aluminium Inverted Roof drain assembly - aluminium grating, fixed 240mm circular, medium sump body with clamp, vertical threaded outlet 3" BSP

Code

34.0353

Description

Frost Inverted Roof drain assembly, aluminium grating, fixed 240mm circular, medium sump body with clamp, vertical threaded outlet 3" BSP
Supplied with grating and clamp.
Rainwater outlets with flat gratings are suited to inverted roof construction where the waterproof membrane is located above the roof deck but below the insulation layer.

Aluminium LM 6 to BS EN 1599-4:2015

Threaded reducers to 2" available

Body Material

ALUMINIUM

Body Type

N/A

Grating Material

ALUMINIUM

Flow Rate

5 l/s

Outlet Type

THREADED

Grating Type

FLAT

Load Rating

L15

Fire Rating

A1

Threaded Joint Instructions

Apply low modulus silicone to the spigot and roof outlet threads, spreading it evenly into the grooves. Screw the male thread clockwise into the outlet, ensuring it does not cross-thread, and wipe away excess silicone once fully tightened.